


TEKHNEPort

Multifunctional Hand-Held

The robust multifunctional hand-held meets the highest requirements and comes with a wide range of accurate probes that fit various applications. Use touch-screen navigation to show, up to three measurement values simultaneously on the capacitive TFT display.

A total of 23 measurands (vary according to probe) is available, including:

- relative humidity RH
- temperature T
- dew point temperature Td
- absolute humidity dv
- mixing ratio r
- air velocity v
- volumetric flow \dot{v}
- air pressure p
- CO₂ ppm

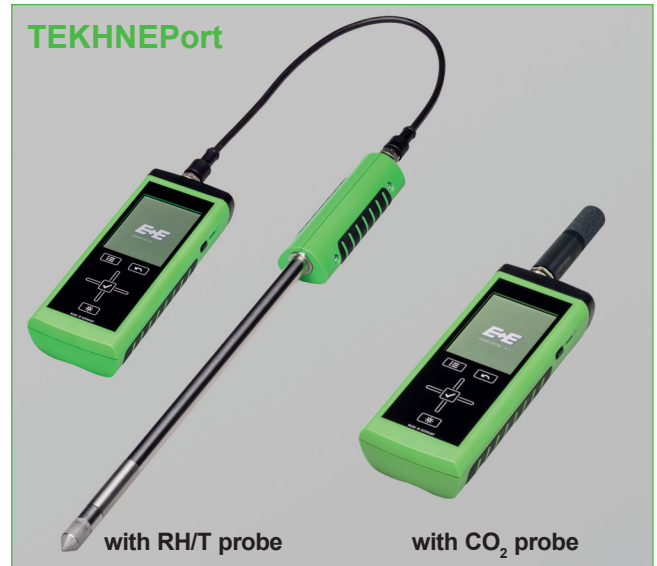

Store measurement values in the internal memory of the device and use the free SmartGraph3 software to manage data on your PC. The optional carrying case accommodates the hand-held and probes, as well as accessories.

Data-Logging & Data-Management

The TEKHNEPort offers both continuous and single-point data-logging. The measurement values of up to three channels are stored simultaneously, together with a time and date stamp, in the internal memory of the device.

Stored measurement data, as well as the minimum, maximum, average and standard deviation values can be shown directly on the display. Scroll through a recorded measurement and switch between graphs by using the control cross.



Data management is easy and intuitive by using the free SmartGraph3 software to create graphs that contain measurement channels of interest for better data analysis. Data can be exported in .csv format and then imported into EXCEL for further processing.

Features

- Data logging**
- Internal memory for 2 million measured values**
- 23 physical quantities**
- Capacitive TFT touch screen**
- Displays measurands simultaneously**

- Real-time HOLD / MIN / MAX / AVG readout**
- Integrated air pressure sensor**
- User friendly operation**
- Free data management software**

Technical Data

General

Power supply	4 x Alkaline LR6 AA batteries, 1.5 V (not in the scope of supply)		
Optional power supply	5V DC via USB (cable included)		
Temperature range	operating: handheld and handle of sensing probe: 0...50°C (32...122°F) storage: -20...60°C (-4...140°F)		
Internal memory	for approx. 2 million measured values		
Housing / protection class	ABS / IP40		
Dimensions (HxWxD)	170 x 62 x 34 mm (6.69 x 2.44 x 1.34")		
Weight	ca. 205g (0.45 lbs)		
Display	TFT display, 54 x 41 mm (2.13 x 1.61"), illuminated		
CE compatibility	Hand-held:	EN61000-6-2:2005	EN61000-6-3:2007
	Logprobe:	EN61326-1:2013	EN61326-2-3:2013




Integrated air pressure sensor

Measuring range	800 to 1100 mbar (complete accuracy)
Accuracy	max. ± 0.5 mbar (at 25 °C, 1013.25 mbar)
Long term stability	typ. -1 mbar/year

HUMIDITY / TEMPERATURE PROBES

LOGPROBE 20 - compact, pluggable HVAC probe



Working range: 0...100% RH / -40...80°C (-40...176°F)
 Accuracy: ±2% RH (0...90% RH), ±3% RH (90...100% RH) @20°C / 68°F
 ±0.2°C / ±0.36°F @20°C / 68°F
 max. ±0.6°C / ±1.08°F (-40...80°C / -40...176°F)

Order code: **LOGPROBE20-HTPC**

Response time τ_{90} : ≤ 30 sec.


Filter: Membrane filter

Order code: **LOGPROBE20-HTPA**

Response time τ_{90} : ≤ 10 sec.

Filter: Plastic grid filter

LOGPROBE 16 - HVAC probe

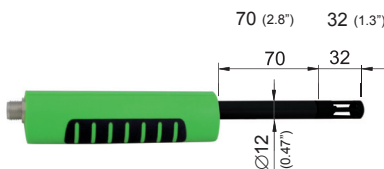


Working range: 0...100% RH / -20...70°C (-4...158°F)
 Accuracy: ±2% RH (0...90% RH), ±3% RH (90...100% RH) @20°C / 68°F
 ±0.2°C / ±0.36°F @20°C / 68°F
 max. ±0.5°C / ±0.9°F (-20...70°C / -4...158°F)

Response time τ_{90} : ≤ 7 sec.

Order code: **LOGPROBE16**

LOGPROBE 31 - high temperature probe

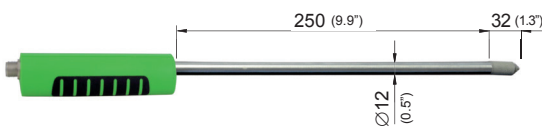


Working range: 0...100% RH / -40...180°C (-40...356°F)
 (grip of sensing probe up to 50°C/122°F)
 Accuracy: ±2% RH (0...90% RH), ±3% RH (90...100% RH) @20°C / 68°F
 ±0.2°C / ±0.36°F @20°C / 68°F
 max. ±0.6°C / ±1.08°F (-40...180°C / -40...356°F)

Response time τ_{90} : ≤ 30 sec.

Temperature dependency: RH: ±0.03% RH/°C (% RH/1.8°F)

Order code: **LOGPROBE31**

LOGPROBE 30 - confined space probe



Working range: 0...100% RH / -40...100°C (-40...212°F)
 Accuracy: ±2% RH (0...90% RH), ±3% RH (90...100% RH) @20°C / 68°F
 ±0.2°C / ±0.36°F @20°C / 68°F
 max. ±0.6°C / ±1.08°F (-40...100°C / -40...212°F)


Response time τ_{90} : ≤ 15 sec.

Temperature dependency: RH: ±0.03% RH/°C (% RH/1.8°F)

Order code: **LOGPROBE30**


AIR VELOCITY PROBES

LOGPROBE 61/60 - stainless steel probe



Working range:	0.08...2m/s (15...400ft/min)	0.2...20m/s (40...400ft/min)
	-20...70°C (-4...158°F)	-20...70°C (-4...158°F)
Accuracy:	± (0.04m/s / 8ft/min + 1% of m. v.)	± (0.2m/s / 39ft/min + 2% of m. v.)
	± 0.7°C / ±1.26°F (0...50°C / 32...122°F)	± 0.7°C / ±1.26°F (0...50°C / 32...122°F)
Response time τ_{90} :	≤ 1.5 sec.	≤ 1.5 sec.
Order code:	LOGPROBE61	LOGPROBE60


LOGPROBE 65 - polycarbonate probe

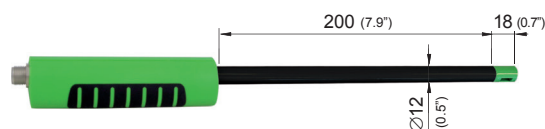

Working range:	0.2...20m/s (40...400ft/min) / 0...50°C (32...122°F)
Accuracy:	± (0.2m/s / 39ft/min + 3% of m.v.)
	± 1°C / ±1.8°F (0...50°C / 32...122°F)
Response time τ_{90} :	≤ 1.5 sec.
Order code:	LOGPROBE65

CO₂ PROBE

LOGPROBE 802/805/810 - CO₂ probe

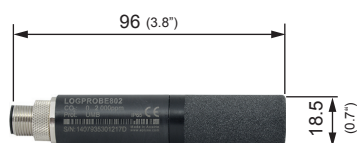

Working range:	0...2000 / 5000 / 10000ppm
Technology:	dual wave NDIR with autocalibration
Accuracy at 25°C and 1013mbar (77°F and 14.69psi)	0...2000ppm: < ± (50ppm +2% of measured value)
	0...5000ppm: < ± (50ppm +3% of measured value)
	0...10000ppm: < ± (100ppm +5% of measured value)
Warm-up time:	3 min.
Temperature dependency:	typ. 1ppm CO ₂ /°C (-20...45°C) (-4...113°F)
Order code:	0...2000ppm LOGPROBE802
	0...5000ppm LOGPROBE805
	0...10000ppm LOGPROBE810

Carrying Case

The optional carrying case protects the handheld, probes and accessories during transport and storage. It helps to avoid mechanical damage, as well as the contamination of the sensors, which is essential for the optimal long term performance of the instrument.



Protective Cover

The optional cover protects the handheld device during usage in dirty or oily environments. The integrated magnetic plate allows an easy temporary fixing of the handheld onto a metallic surface on site, while the hang-on straps helps keep your hands free while taking measurements.



Ordering Guide

		Pluggable Probes ¹⁾	Remote Probes ²⁾
POSITION 1	BASIC DEVICE	TEKHNEPort	TEKHNEPort
POSITION 2	CABLE 2m (6.6ft)		HA010813
POSITION 3	PROBES		
	Humidity / Temperature		
	LOGPROBE 20 - Response time ≤ 30 sec.	LOGPROBE20-HTPC	
	LOGPROBE 20 - Response time ≤ 10 sec.	LOGPROBE20-HTPA	
	LOGPROBE 16 - HVAC probe		LOGPROBE16
	LOGPROBE 31 - high temperature probe		LOGPROBE31
	LOGPROBE 30 - confined space probe		LOGPROBE30
	Air Velocity		
	LOGPROBE 61 - stainless steel probe / 0.08...2m/s (15...400ft/min)		LOGPROBE61
	LOGPROBE 60 - stainless steel probe / 0.2...20m/s (40...400ft/min)		LOGPROBE60
	LOGPROBE 65 - polycarbonate probe / 0.2...20m/s (40...400ft/min)		LOGPROBE65
	CO₂		
	LOGPROBE 802 - 0...2000ppm	LOGPROBE802	
	LOGPROBE 805 - 0...5000ppm	LOGPROBE805	
	LOGPROBE 810 - 0...10000ppm	LOGPROBE810	
POSITION 4	CARRYING CASE For basic device and up to 4 probes	HA040906	HA040906

1) Directly connected to device, cable is optional
2) Cable is necessary

Order Example

Pluggable Probes:

Position 1 - Basic Device TEKHNEPort
Position 2 - Probe LOGPROBE805
Position 3 - Carrying Case HA040906

Remote Probes:

Position 1 - Basic Device TEKHNEPort
Position 2 - Cable HA010813
Position 3 - Probes LOGPROBE16
 LOGPROBE61
Position 4 - Carrying Case HA040906

Accessories

Carrying case for basic device, 2 pluggable and 2 remote probes	HA040906
Protective cover	HA040907
Membrane filter PC (for Ø12mm RH/T probes)	HA010118
Metal grid filter PC (for Ø12mm RH/T probes)	HA010119
Stainless steel sintered filter (for Ø12mm RH/T probe)	HA010103
Plastic grid filter PC (for Logprobe 20-HTPA)	HA010121
Cable for remote probes 2m (6.6ft)	HA010813
Humidity standards / Calibration device	TKPORT-OP2



TEKHNE Corporation

6-14-10, Futago, Takatsu-ku, Kawasaki-City,
Kanagawa 213-0002 Japan
TEL: +81-44-379-3697
FAX: +81-44-379-4105
URL: <http://www.tekhne.co.jp>
MAIL: info@tekhne.co.jp